Just Acoustics

Acoustic panels for interior designers and architects

Just Acoustics designs, supplies and installs fabric wrapped acoustic panels across Singapore. Send us a plan and we send back a spec sheet, a render and a trade quote, usually within the hour.



Who we are

We are a Singapore acoustic treatment company. We plan the layout, supply the panels and install them with our own team, so you deal with one party from drawing to handover.

Our work covers offices, restaurants and cafés, studios, schools, churches, clinics and homes. Most rooms are installed in a few hours to two days, and we can work after hours or on weekends around your site programme.

We do acoustic treatment: making a room sound clearer and calmer by controlling echo. We are not a soundproofing contractor, and we will tell you early if a brief really needs sound isolation instead.

What we do for designers

A plan in, a spec out

Send a floor plan, elevation or a few photos. We return a panel layout, a render in your colours, a spec sheet and a trade quote.

Your brand on it

Proposals can carry your logo, with our name kept small, so you present one scheme to your client.

Real numbers

Every proposal states the room's estimated RT60 before and after treatment, so you can show the client what changes.

We install

Our crew installs and cleans up. You get one point of contact and photos at handover.

Product range

Every product has its own one-page spec sheet in the downloads.



Flexi™ acoustic wall panel

Fabric wrapped panel, bevel edged or straight edged, for walls

Sizes 600 × 600 mm · 1200 × 600 mm (standard) · 1800 × 600 mm (tall) · Custom sizes on request
Thickness 25 mm or 50 mm
Acoustic NRC 1.00 at 50 mm, NRC 0.80 at 25 mm (supplier data, lab report [check]). Weighted αw 0.90 (EN ISO 354 / EN ISO 11654, core test, SGS report)



Flexi™ ceiling panel and cloud

Fabric wrapped panel for ceilings, flush fixed or suspended as a cloud

Sizes 1200 × 600 mm (standard) · Custom sizes on request
Thickness 50 mm
Acoustic NRC 1.00 at 50 mm (supplier data, lab report [check]). Suspended clouds absorb on both faces



Flexi™ 100 mm bass panel

Double-depth fabric wrapped panel for low-frequency control

Sizes 1200 × 600 mm
Thickness 100 mm
Acoustic No published test data yet [check] . We count it as a 50 mm panel in RT60 estimates, so our figures are conservative



Flexi™ fabric wall and ceiling system

Stretched fabric over an absorbent infill, wall to wall, on a perimeter track

Sizes Made to the wall or ceiling, priced per m²
Thickness 25 mm
Acoustic NRC 0.80 to 0.90 (supplier data [check] ; some past quotes state 0.75)



Melamine foam ceiling panel

Lightweight white panel fixed flush to the ceiling

Sizes 1200 × 600 mm
Thickness 50 mm
Acoustic No verified test data on file [check] . Counted conservatively in our RT60 estimates



Custom print acoustic panel

Your artwork, logo or photo printed on an acoustic panel

Sizes 600 × 600, 1200 × 600, 1800 × 600 mm · Custom sizes after artwork review
Thickness 25 mm or 50 mm
Acoustic Printed synthetic face over the Flexi core. Absorption of the printed face [check]

Materials and safety


High-density semi-rigid glass fibre, 96 kg/m³, resin-hardened edges, glass tissue micro-mesh backing. Faced in acoustically transparent polyester fabric, 39 standard colours; or paintable white glass fibre tissue face.

Flexi™
Acoustic Panels

Flexi™ panels are made with high-density 96kg/m³ semi-rigid glass fibre core with resin-hardened bevelled edges. The edge treatment works with the glass wool micro-mesh backing to fully encapsulate the fibres, preventing any particulate release during installation or use.

Panels come in two finish options: acoustically transparent polyester fabric wrap, or a paintable white glass fibre tissue face that accepts standard latex paint for custom colour matching.

For safety compliance, Flexi™ panels are tested to Class A1 non-combustible standards (EN 13501-1) and meet Singapore's requirements, making them suitable for offices, restaurants, studios, churches, and residential applications.

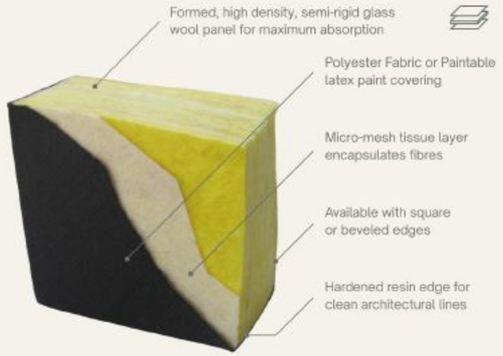

5

Test	Result	Source
Reaction to fire (EN 13501-1:2007+A1:2009)	**Class A1, membrane components**	SGS report XMIN180901795CCM, 29 Oct 2018
Formaldehyde (EN 717-1:2004)	**Not detected**	SGS report XMIN180901795CCM
Asbestos (NIOSH 9002 / 9000)	**Negative**	SGS report XMIN180901795CCM
SVHC screening	**Pass**	SGS report XMIN180901795CCM
Sound absorption (EN ISO 354 / EN ISO 11654)	**αw 0.90**	SGS report XMIN180901795CCM (test by Tsinghua University building environment lab)
Thermal conductivity (EN 12664)	**0.033 W/(m·K)**	SGS report XMIN180901795CCM
Fabric: UK Furniture and Furnishings (Fire) (Safety) Regulations 1988, Sch. 4 Part I and Sch. 5 Part I	**Pass**	SGS report SDHL1803005038FB, 30 Mar 2018
NRC 1.00 at 50 mm (ASTM C423)	**Supplier data**	[check] lab report not on file
BS 476 Part 4 and ASTM E136 non-combustibility	**Stated in supplier data**	[check] report not on file
Singapore Green Label or SGBC certification	**None on file**	[check]

Reports cover the Flexi™ core and fabric and are available on request. Fire-safety acceptance of an installation rests with the project's QP and the relevant authority.

Colours and edges


39 standard Flexi™ fabric colours. Colours are dyed fabric, so screens and print will differ. Ask for the physical swatch card before you specify. A paintable white face is available when you need an exact paint match.

Fabric wrapped panel, bevel edged

The standard Flexi™ edge. A small chamfer softens the panel outline and reads well in grids with even reveals.

Fabric wrapped panel, straight edged

A square, crisp edge for tight-butted runs and full-wall layouts.



Colour Chart






Bevel edge, Flexi™ 50 mm in a light grey fabric.

Fixing methods



Wall, no drilling

Impaling clips and adhesive. Clean and quick on painted plaster and board.




Wall, mechanical

Clips screwed to board or masonry where adhesive is not suitable.



Ceiling, flush

Fixed tight to the soffit with helical anchors, four per panel.



Ceiling, suspended cloud

Hung about 100 mm below the soffit on four spring and wire sets, one per corner.



Fabric system

Perimeter track on the wall or ceiling, fabric stretched over the infill.

- Panels go on solid walls and ceilings only. We do not fix to glass, windows or demountable partitions.
- Ceilings above 3 m need mobile scaffolding. We plan this in the quote.
- We keep clear of sprinklers, detectors, diffusers and lights, and model every fixture in the 3D layout first.

Lead times

Proposal	Spec sheet, render and trade quote within an hour of a usable plan in working hours.
Production	About 15 working days after the deposit. Nothing is cut before the deposit is received.
Shipping	Sea freight 14 to 18 days, or express air freight in a few days at extra cost.
Install	A few hours to two days on site, after hours or weekends if needed.
Typical total	About 4 to 6 weeks from deposit to installed. We confirm a date when you order.

We under-promise on dates. If your programme is tight, tell us at the proposal stage and we will price air freight.




Design guidance by space

RT60 is the time a sound takes to fade by 60 dB. It is the number we design to, and every proposal states it before and after.

Space	Target RT60
Meeting rooms	**0.4 to 0.5 s**
Classrooms and training rooms	**0.4 to 0.6 s**
Restaurants and cafés	**0.5 to 0.7 s**
Churches and halls	**0.8 to 1.2 s**
Open offices	**0.5 to 0.7 s** [check]
Clinics and consult rooms	**0.4 to 0.6 s** [check]
Pilates, dance and fitness studios	**0.6 to 0.9 s** [check]
Living rooms and home cinemas	**0.3 to 0.5 s** [check]
Home and recording studios	**0.2 to 0.4 s** [check]

Before and after, from our room models

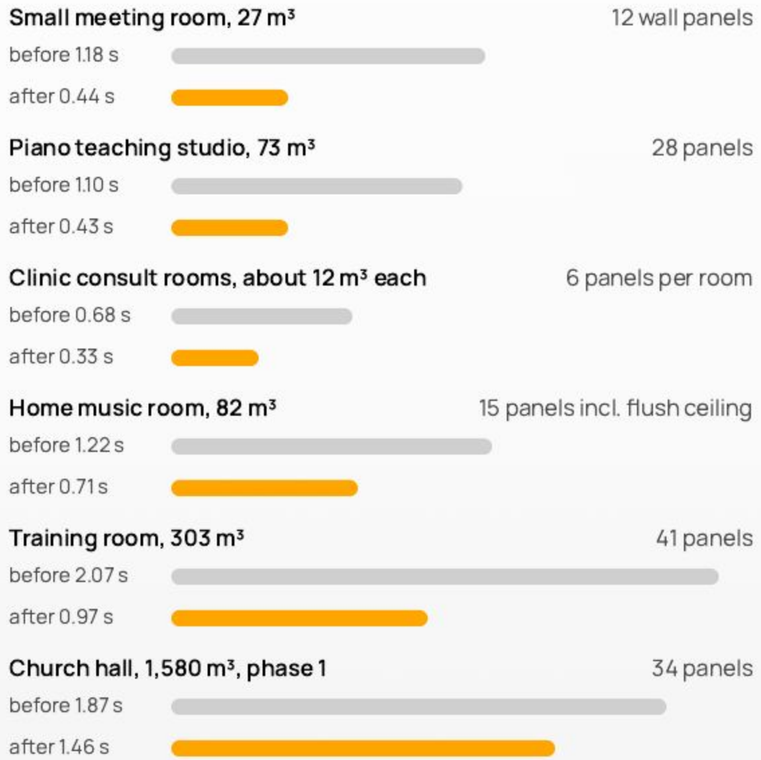

Estimates from our room calculator on the 3D model of each room, normal furnishings. Phase 1 jobs stop short of target by budget.

Meeting rooms. Treat the two long walls at seated head height, staggered so panels do not face each other. Add a ceiling cloud over the table in rooms over 3 m high.

Restaurants and cafés. Most of the noise comes off hard ceilings. Suspended clouds over the dining area do the heavy lifting; wall panels above banquettes add warmth.

Offices. Ceiling clouds over desks first, then wall panels behind call areas and on glass-facing walls opposite.

Homes. Keep it calm: tall panels in a soft colour on one or two walls, and flush white ceiling panels where the ceiling is bare.

Studios. Treat first reflection points, the wall behind the listener and the corners. Use 100 mm panels for bass.

Selected projects



Restaurant dining room

Acqua e Farina

A busy Italian dining room with a hard ceiling and long banquette walls. Conversations were getting lost by mid-service.

What we did. 9 fabric wrapped panels, bevel edged, 50 mm, made to fit above the banquettes: custom widths from 1,204 to 1,748 mm at 510 mm high. A top-up to an earlier ceiling treatment.

RT60 before → after: [check] not modelled




Corporate meeting rooms

Amazon Singapore office

Video-call rooms with glass, hard walls and a lot of speech. Calls sounded hollow at both ends.

What we did. 30 m² of the Flexi™ fabric wall system, 25 mm, on a perimeter track, in fabric colour Champagne, wall to wall behind the screens.

RT60 before → after: [check] not modelled

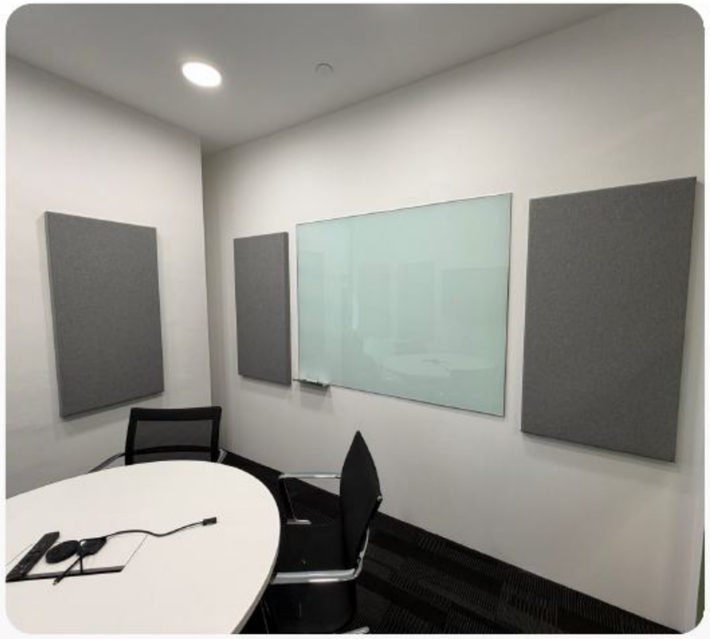

New office, two rooms


Hoogwegt

A fresh fit-out with bare white walls and a glass front. The meeting rooms rang.

What we did. 14 Flexi™ fabric wrapped panels, bevel edged, 1200 × 600 × 50 mm, in grey, mounted vertically on the solid walls.

RT60 before → after: [check] not modelled

Selected projects

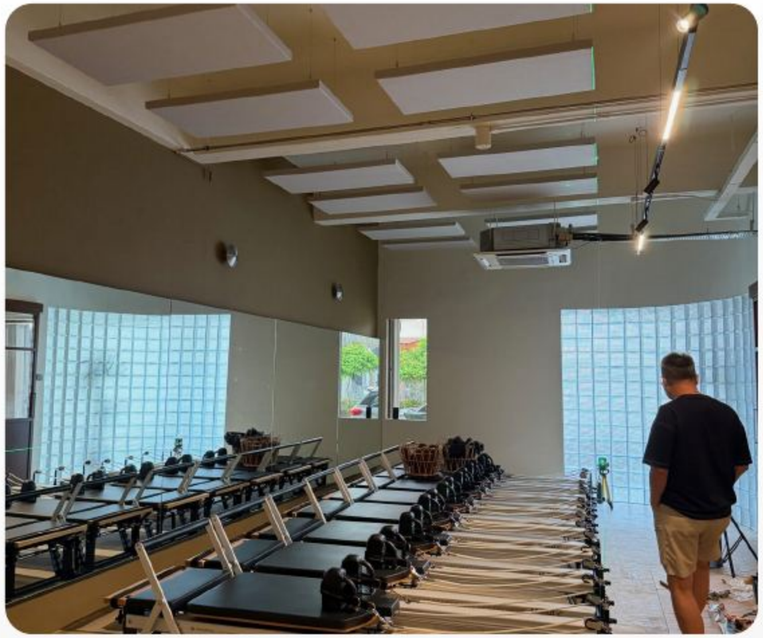

Reformer pilates studio

Boutique pilates studio

A high, hard ceiling over a full reformer floor. Instructors had to shout over the music.

What we did. 22 Flexi™ ceiling panels, 1200 × 600 × 50 mm, in a colour chosen by the client, set in a grid with the lighting, above 3 m.

RT60 before → after: [check] not modelled



Grand piano living room

Residential

A grand piano in an open living and dining room. Notes rang on and the room felt harsh.

What we did. 6 white ceiling panels fixed flush (2 at 1000 × 1000, 4 at 1200 × 1000 × 50 mm) and 4 wall panels in Beige 01 (1 at 1600 × 1000, 3 at 1000 × 700 × 50 mm).

RT60 before → after: [check] not modelled

More projects

Offices, schools, churches, studios and homes at justacoustics.co/projects. Ask us for references close to your brief.

How the trade desk works

One upload. A finished scheme back within the hour, in working hours.

1

Send the plan

Upload a floor plan, RCP or elevation (PDF, DWG or a photo), with ceiling height, finishes and the client's brief. Photos of the site help.

2

Within the hour

We send back a panel layout, a render in your chosen colours, a one-page spec sheet and a trade quote with the RT60 before and after.

3

Present it your way

Choose our branding or yours. White-label proposals carry your logo, with Just Acoustics kept small.

4

We build it

On your go-ahead and the deposit we order, confirm the install date and install. You get photos at handover.



A typical render from our room designer: panels placed on your plan, in your colours.

Trade terms

Registered design and architecture practices get trade pricing on every quote. Ask us for the trade terms when you register.

Downloads

- **Spec sheets** · One page per product, PDF
- **CAD blocks** · Standard panel sizes as DXF and SVG, elevation and section, 1:1 in mm
- **Colour chart** · 39 standard Flexi™ fabric colours

At justacoustics.co/trade

Send us your next plan.

Upload it at justacoustics.co/trade, or message us with the drawing attached.

WhatsApp +65 8930 1905

Email info@justacoustics.co

Web justacoustics.co/trade

Just Acoustics

